


# PWSOLAR 100W MONOCRYSTALLINE MODULE

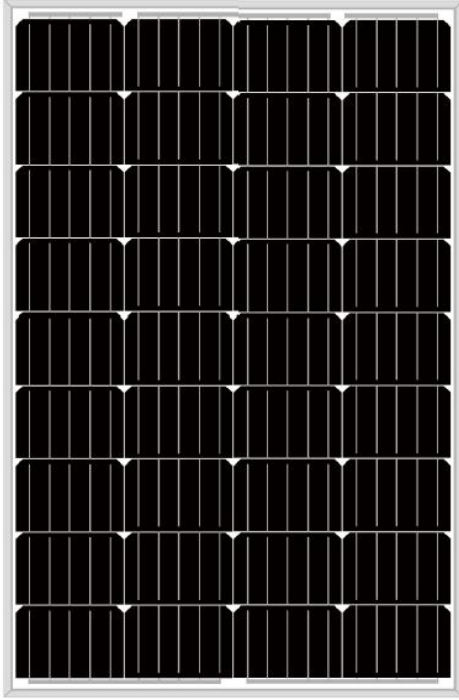

## ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- ◆ High module conversion efficiency up to 15.04% by using innovative Half-cell design and Multi-busbar(MBB) cell technology.
- ◆ Low temperature coefficient and excellent performance under high temperature and low light conditions.
- ◆ Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- ◆ High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- ◆ Potential induced degradation (PID) resistance.
- ◆ Positive power tolerance of 0 ~ +5w.

## ELECTRICAL CHARACTERISTICS AT STC

Model	PW100Wp-36M
Maximum Power ( $P_{max}$ )	100W
Power Tolerance	0 ~ + 5W
Open Circuit Voltage (VOC)	22.60V
Short Circuit Current (ISC)	5.87A
Voltage at Nominal Power ( $V_{mp}$ )	18.00V
Current at Nominal Power ( $I_{mp}$ )	5.56A
Size of Module	1000 x 670 x 30mm
Standard Test condition	Irradiance:1000W/M2 Temp: 25°C , & AM :1.5G spectrum
Maximum system voltage	1000V DC
Operating temperature	- 40°C to +85°C
Module Efficiency	15.04%

## ELECTRICAL CHARACTERISTICS AT STC

NOCT	45 +/- 2°C
Voltage temperature coefficient( $V_{oc}$ )	-0.33%/°C
Current temperature coefficient ( $I_{sc}$ )	+0.058%/°C
Power temperature coefficient( $P_{mpp}$ )	-0.400%/°C
Minimum power tolerance	+/-10%
NOCT	45 +/- 2°C



## MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline
Number of cell	36pcs (4 x 9)
Size of Module	1000 x 670 x 30mm
Weight	About 6.50kgs
Front Cover	3.2mm tempered glass with AR coating
Frame	Anodized aluminum alloy
Junction Box	IP67, 3 diodes
Cable	4mm <sup>2</sup> (0.006inches <sup>2</sup> ), 900mm (11.81inches)
Connector	MC4 or MC4 compatible

## MODULE WARRANTY

25-year limited warranty of 80% power output; 10-year limited warranty of 90% power output; 5-year limited warranty of materials and workmanship.


## PACKING

Standarding Packing: 120pcs/Pallet


Module Quantity of 20' container: 1200pcs

Module Quantity of 40' container: 2700pcs

## ENGINEERING DRAWING

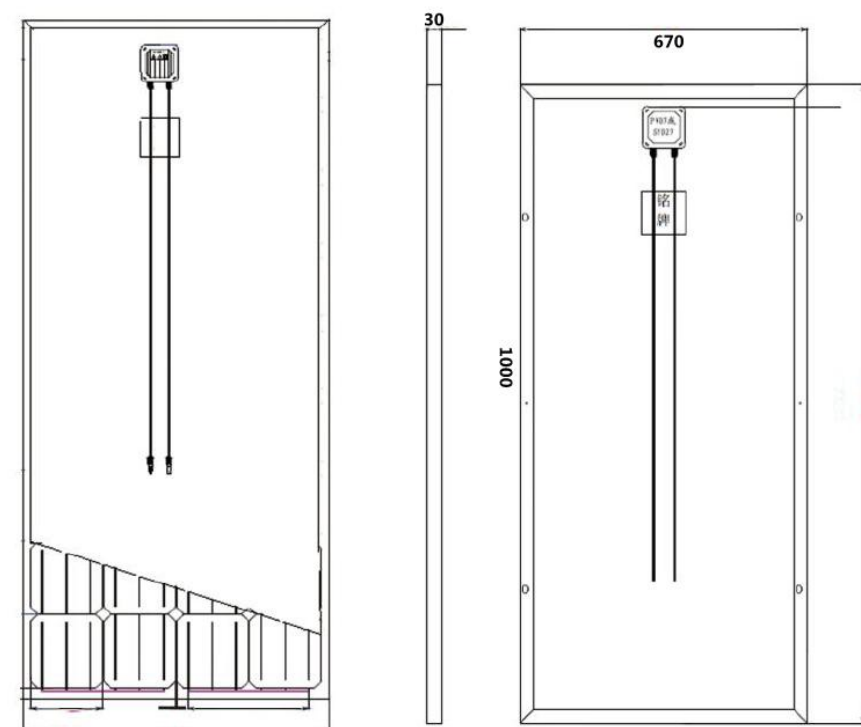

## IV CURVES

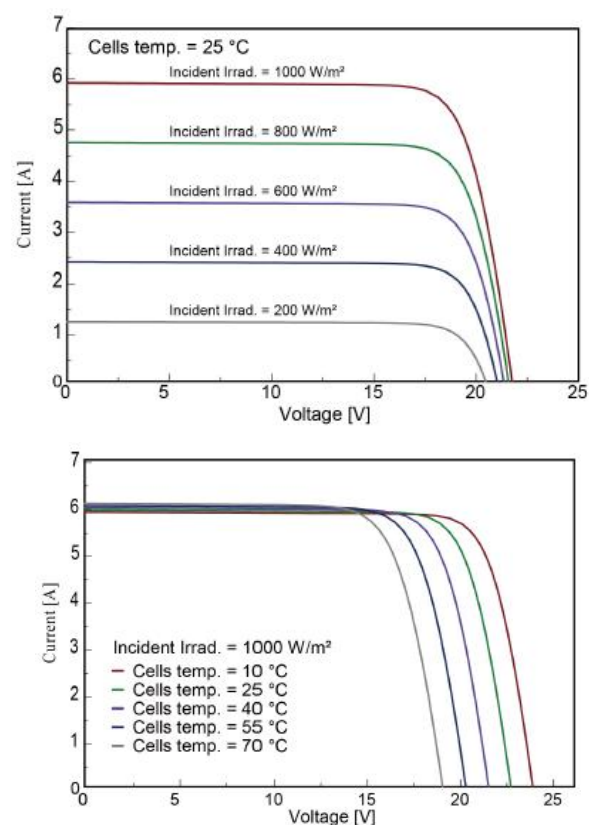

Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000

0086 532 85872070

0086 155 6392 6558

WhatsApp 0086 138 6421 6496

sales@pwsolarpower.com

info@pwsolarpower.com

www.pwsolarpower.com

Specifications in this datasheet are subject to change without prior notice