
PWSOLAR 200W

MONOCRYSTALLINE MODULE

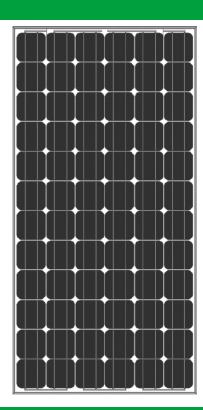

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module conversion efficiency up to 20.90% by using innovative Half-cell design and Multi-busbar(MBB) cell technology.
- Low temperature coefficient and excellent performance under high temperature and low light conditions.
- Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- Potential induced degradation (PID) resistance.
- Positive power tolerance of 0 ~ +5w.

ELECTRICAL CHARACTERISTICS AT STC

Model	PW200Wp-72M
Maximum Power (Pmax)	200W
Power Tolerance	0 ~ + 5W
Open Circuit Voltage (VOC)	45.20V
Short Circuit Current (ISC)	5.72A
Voltage at Nominal Power (Vmp)	36.90V
Current at Nominal Power (Imp)	5.43A
Size of Module	1580 x 808 x 35mm
Standard Test condition	Irradiance:1000W/M2 Temp: 25° C , & AM :1.5G spectrum
Maximum system voltage	1000VDC
Operating temperature	40°C to +85°C
Module Efficiency	15.67%

ELECTRICAL CHARACTERISTICS AT STC

NOCT	45 +/ ⋅ 2°C
Voltage temperature coefficient(Voc)	-0.330%/°C
Current temperature coefficient I sc)	+0.058%/°C
Power temperature coefficient(Pmpp)	-0.400%/°C
Minimum power tolerance	+/-10%
NOCT	45 +/ ⋅ 2°C

















MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline (125*125)
Number of cell	72pcs
Size of Module	1580 x 808 x 35mm
Weight	About 15.50kgs
Front Cover	3.2mm tempered glass with AR coating
Frame	Anodized aluminum alloy
Junction Box	IP67, 3 diodes
Cable	4mm ² (0.006inches ²), 900mm
Connector	MC4 or MC4 compatible

MODULE WARRANTY

25-year limited warranty of 80% power output; 10-year limited warranty of 90% power output; 12-year limited warranty of materials and workmanship.

PACKING


Standarding Packing: 29pcs/Pallet

Module Quantity of 20' container: 348pcs

Module Quantity of 40' container: 812pcs

ENGINEERING DRAWING

IV CURVES

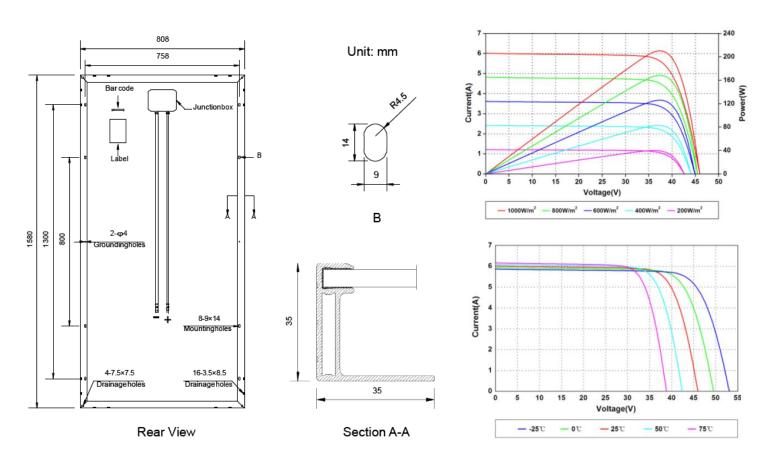







Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000 0086 532 85872070 0086 155 6392 6558 Whatbapp 0086 138 6421 6496 sales@pwsolarpower.com info@pwsolarpower.com www.pwsolarpower.com