


PWSOLAR BIFACIAL

455W Double Glass

MONOCRYSTALLINE MODULE

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

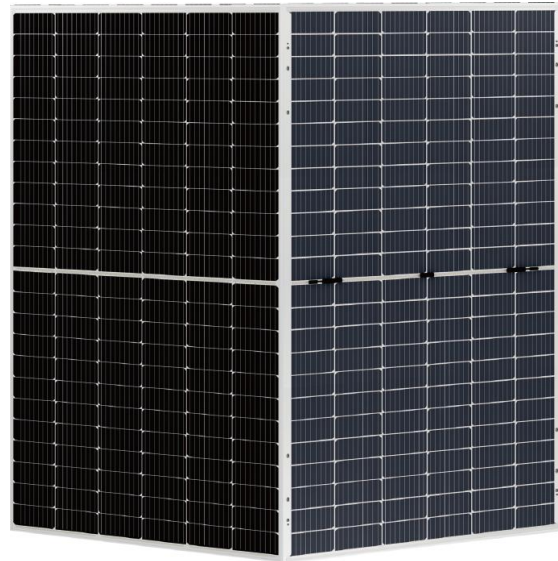

- ◆ High module conversion efficiency up to 20.90% by using innovative Half-cell design and Multi-busbar(MBB) cell technology.
- ◆ Low temperature coefficient and excellent performance under high temperature and low light conditions.
- ◆ Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- ◆ High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- ◆ Potential induced degradation (PID) resistance.
- ◆ Power tolerance of $\pm 5\%$.

ELECTRICAL CHARACTERISTICS AT STC

Model	PWDG455Wp-144M
Maximum Power (P_{max})	455W
Power Tolerance	$\pm 5\%$
Open Circuit Voltage (VOC)	49.75V
Short Circuit Current (ISC)	11.46A
Voltage at Nominal Power (V_{mp})	41.55V
Current at Nominal Power (I_{mp})	10.83A
Size of Module	2095 x 1039 x 30mm
Standard Test condition	Irradiance:1000W/M2 Temp: 25°C , & AM :1.5G spectrum
Maximum system voltage	1000VDC/1500VDC
Operating temperature	40°C to +85°C
Module Efficiency	20.90%

ELECTRICAL CHARACTERISTICS AT STC

NOCT	45 $\pm$ 2°C
Voltage temperature coefficient(V_{oc})	-0.330%/°C
Current temperature coefficient (I_{sc})	+0.058%/°C
Power temperature coefficient(P_{mpp})	-0.400%/°C
Minimum power tolerance	$\pm$ 10%
NOCT	45 $\pm$ 2°C



Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000

0086 532 85872070

0086 155 6392 6558 WhatsApp 0086 138 6421 6496

sales@pwsolarpower.com

info@pwsolarpower.com

www.pwsolarpower.com

MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline
Number of cell	144pcs (2 x 72)
Size of Module	2095 x 1039 x 30mm
Weight	About 26.50kgs
Front Glass	2.0mm Semi tempered coated glass
Interlayer	EVA/POE/PVB
Back Glass	2.0mm Semi tempered coated glass
Frame	30mm Alumium Frame
Junction Box	IP67, 3 diodes
Cable	4mm ² (0.006inches ²), Portrait : 300mm, Landscape: 1200mm
Connector	MC4 or MC4 compatible
Maximum Load Capacity(Pa)	2400(wind load)/5400(snow load)

MODULE WARRANTY


12 year limited product; limited linear power warranty: 12 year 91.20% of nominal power output, 30 year 80.60% of nominal power output.
20 years product warranty; 30 years linear power output warranty

PACKING

Standarding Packing: 35pcs/Pallet Module Quantity of 20' container: 385pcs Module Quantity of 40' container: 770pcs

ENGINEERING DRAWING

IV CURVES

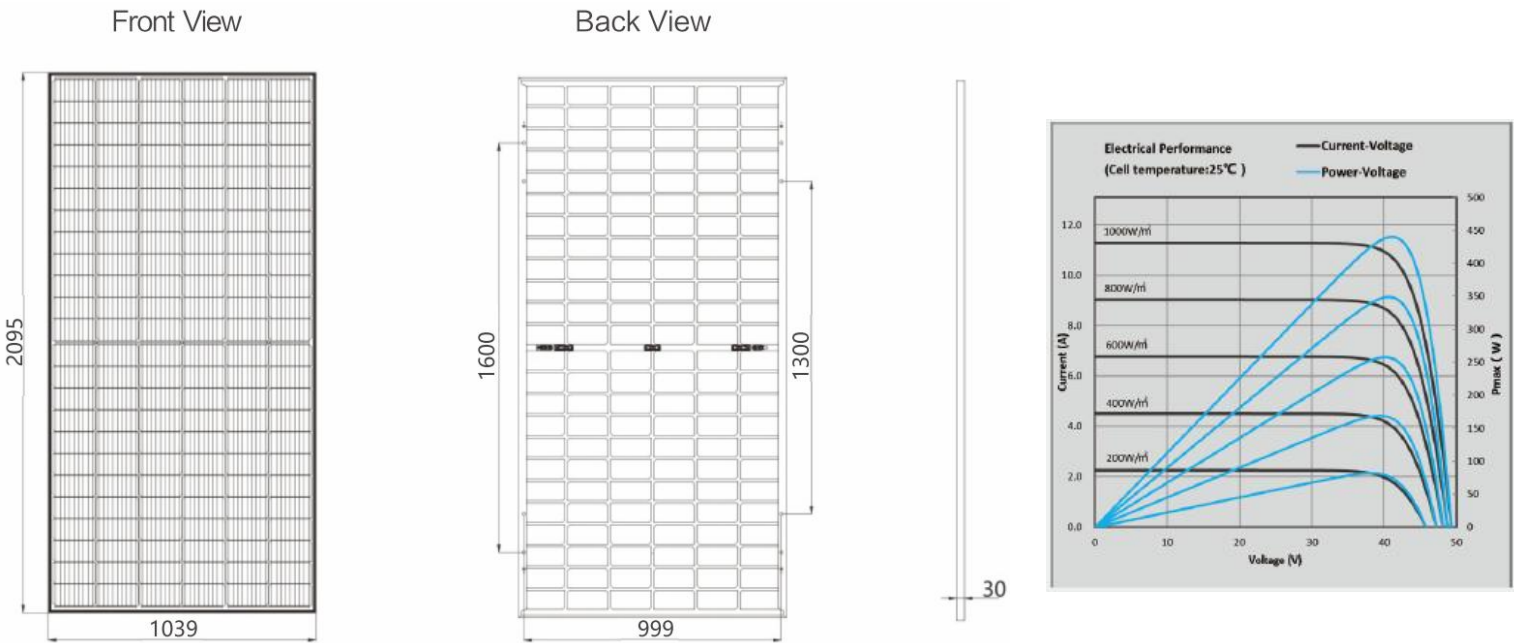

Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000

0086 532 85872070 0086 155 6392 6558 WhatsApp 0086 138 6421 6496

sales@pwsolarpower.com info@pwsolarpower.com www.pwsolarpower.com