

# Product Data Sheet

Product Model : ASP-S1-94W

Nominal Power : 94W

performance at STC: 1000W/m<sup>2</sup>, 25°C, AM1.5

Nominal Power(Pm)	94.0 W
Open Circuit Voltage(Voc)	122.5 V
Short Circuit Current (Isc)	1.06 A
Voltage at max. Power(Vm)	98.0 V
Current at max. Power(Im)	0.96 A
Power Output	25 years power output guarantee, for 90% of nominal output during first 10 years and 80% over 25 years.
materials and workmanship	10 years

## System Properties (at STC)

Maximum System Voltage	V <sub>sys</sub> (V)	1000 (600UL)
Maximum Series Fuse	I <sub>cf</sub> (A)	2.0

## Temperature Coefficients (at STC)

Temperature Coefficients of Isc	$\alpha = 0.060\%/^{\circ}\text{C}$
Temperature Coefficients of Voc	$\beta = -0.321\%/^{\circ}\text{C}$
Temperature Coefficients of Pm	$\gamma = -0.214\%/^{\circ}\text{C}$


## Mechanical Specifications

Length	1200(-1~+5) mm
Width	600(-1~+5) mm
Thickness	6.8(±0.2) mm
Area	0.72m <sup>2</sup>
Weight	11.8kg

Qingdao Power World Co., Ltd. Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000

Frame	N/A
Junction Box※	backside
Lead Cable	2.5mm <sup>2</sup> · 580mm
Connectors	MC4
Bypass Diode	10A
Cell Type	CdTe
Structure	32mm+PVB+3.2mm Cell/Float
Encapsulation	EVA+Edge tape
Transparency※	0%

Product schematic drawings :

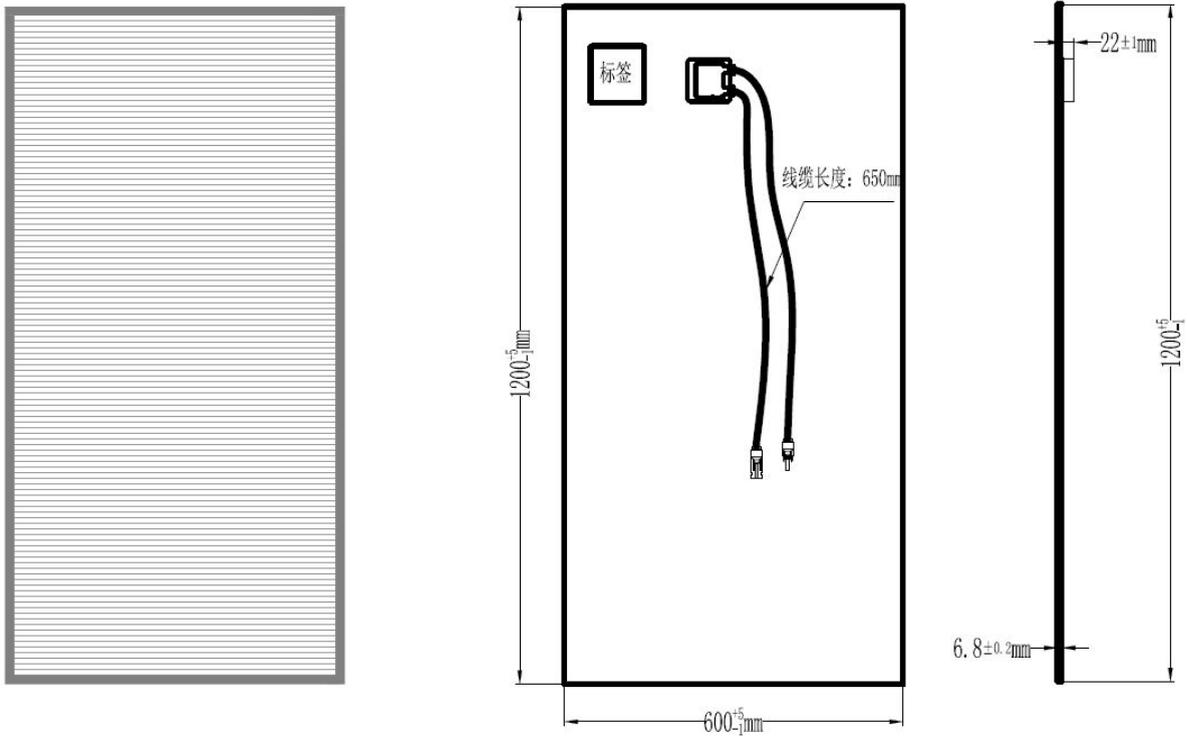

Product packaging : Wooden cases 54pcs/case  
Dimension: L1300mm\*W1080mm\*H800mm

Gross weight:670 kg

Qingdao Power World Co., Ltd. Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District,  
Qingdao, China 266000