


PWSOLAR

480W 132 cells series

MONOCRYSTALLINE MODULE

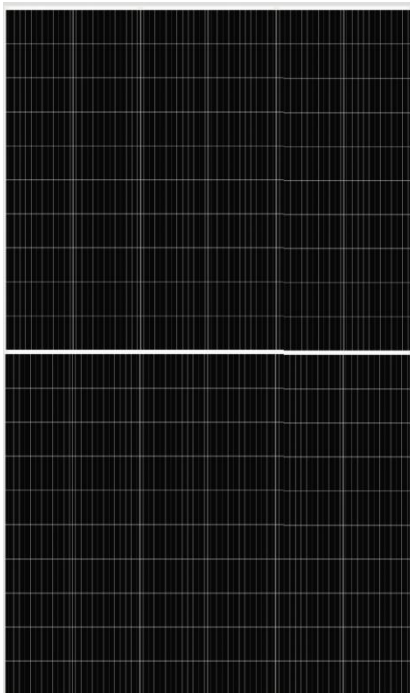

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- ◆ High module conversion efficiency up to 20.40% by using innovative Half-cell design and Multi-busbar(MBB) cell technology.
- ◆ Low temperature coefficient and excellent performance under high temperature and low light conditions.
- ◆ Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- ◆ High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- ◆ Potential induced degradation (PID) resistance.
- ◆ Power tolerance of $\pm 5\%$.

ELECTRICAL CHARACTERISTICS AT STC

Model	PW480Wp-132M
Maximum Power (P_{max})	480W
Power Tolerance	$\pm 5\%$
Open Circuit Voltage (VOC)	44.95V
Short Circuit Current (ISC)	13.59A
Voltage at Nominal Power (V_{mp})	37.78V
Current at Nominal Power (I_{mp})	12.71A
Size of Module	2073 x 1133 x 35mm
Standard Test condition	Irradiance:1000W/M2 Temp: 25°C , & AM :1.5G spectrum
Maximum system voltage	1000VDC/1500VDC
Operating temperature	- 40°C to +85°C
Module Efficiency	20.40%

ELECTRICAL CHARACTERISTICS AT STC

NOCT	45 \pm 2°C
Voltage temperature coefficient(V_{oc})	-0.330%/°C
Current temperature coefficient (I_{sc})	+0.058%/°C
Power temperature coefficient(P_{mpp})	-0.400%/°C
Minimum power tolerance	+/-10%
NOCT	45 \pm 2°C



Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000

0086 532 85872070 0086 155 6392 6558 WhatsApp 0086 138 6421 6496

sales@pwsolarpower.com info@pwsolarpower.com www.pwsolarpower.com


MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline (182*182)
Number of cell	132pcs (6 x 22)
Size of Module	2073 x 1133 x 35mm
Weight	About 30.60kgs
Front Cover	3.2mm tempered glass with AR coating
Frame	Anodized aluminum alloy
Junction Box	IP68, 3 diodes
Cable	4mm ² (0.006inches ²), Postive : 300mm, Negative: 200mm Length can be customized
Connector	MC4 or MC4 compatible
Maximum Load Capacity(Pa)	2400(wind load)/2400(snow load)

MODULE WARRANTY

12 year limited product; limited linear power warranty: 12 year 91.20% of nominal power output, 30 year 80.60% of nominal power output.
20 years product warranty; 30 years linear power output

- Linear performance warranty from PWSOLAR
- Standard performance warranty

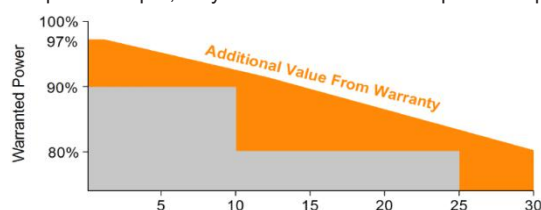


PACKING

Standarding Packing: 27pcs/Pallet


Module Quantity of 20' container:155pcs

Module Quantity of 40' container: 682pcs


ENGINEERING DRAWING

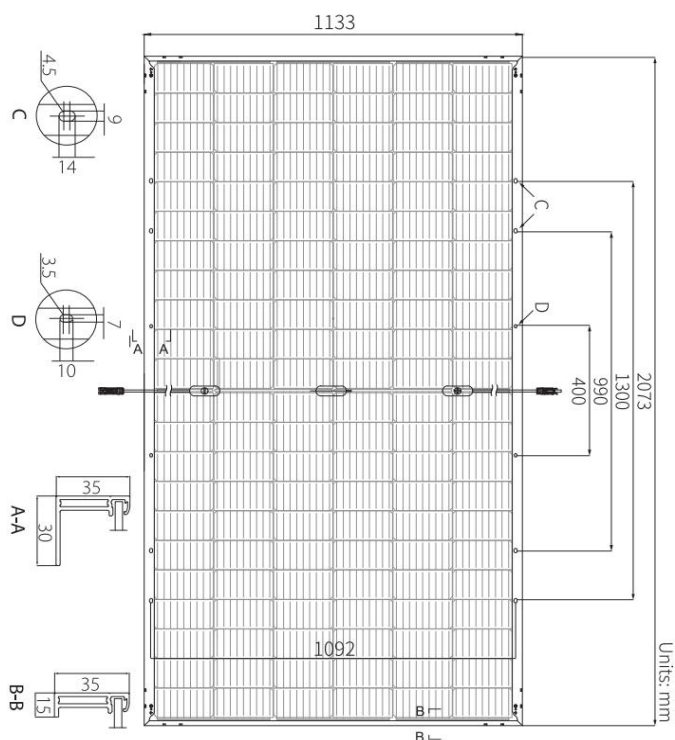

IV CURVES

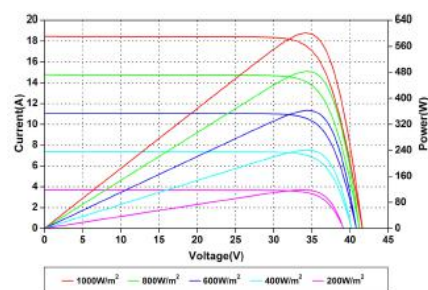

Current-Voltage and Power-Voltage Curves at Different Irradiances

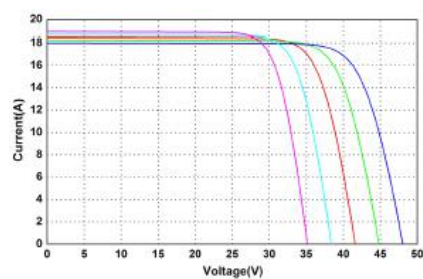

Current-Voltage Curves at Different Temperatures



Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000
 0086 532 85872070 0086 155 6392 6558 WhatsApp 0086 138 6421 6496
 sales@pwsolarpower.com info@pwsolarpower.com www.pwsolarpower.com

Specifications in this datasheet are subject to change without prior notice