


# PWSOLAR 40W POLYCRYSTALLINE MODULE

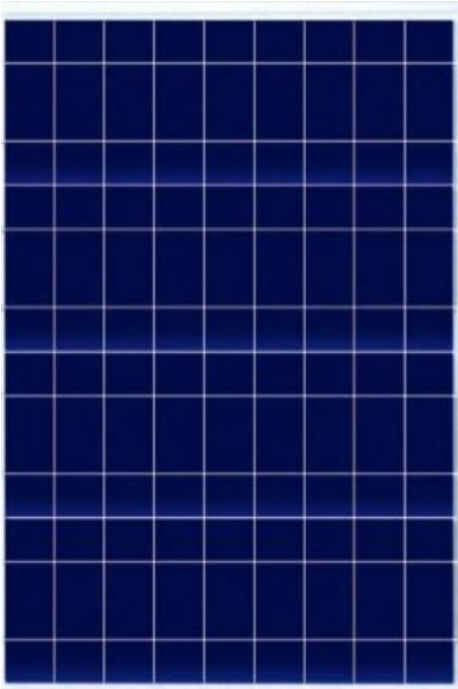

## ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- ◆ High module conversion efficiency up to 15.00% by using innovative Half-cell design and Multi-busbar(MBB) cell technology.
- ◆ Low temperature coefficient and excellent performance under high temperature and low light conditions.
- ◆ Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- ◆ High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- ◆ Potential induced degradation (PID) resistance.
- ◆ Positive power tolerance of 0 ~ +5w.

## ELECTRICAL CHARACTERISTICS AT STC

Model	PW40Wp-36P
Maximum Power ( $P_{max}$ )	40W
Power Tolerance	0 ~ + 5W
Open Circuit Voltage (VOC)	21.10V
Short Circuit Current (ISC)	2.74A
Voltage at Nominal Power ( $V_{mp}$ )	17.50V
Current at Nominal Power ( $I_{mp}$ )	2.29A
Size of Module	670 x 420 x 23mm
Standard Test condition	Irradiance:1000W/M2 Temp: 25°C , & AM :1.5G spectrum
Maximum system voltage	1000VDC
Operating temperature	40°C to +85°C
Module Efficiency	15.00%

## ELECTRICAL CHARACTERISTICS AT STC

NOCT	45 +/- 2°C
Voltage temperature coefficient( $V_{oc}$ )	-0.330%/°C
Current temperature coefficient ( $I_{sc}$ )	+0.058%/°C
Power temperature coefficient( $P_{mpp}$ )	-0.400%/°C
Minimum power tolerance	+/-10%
NOCT	45 +/- 2°C



Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000

0086 532 85872070 0086 155 6392 6558 WhatsApp 0086 138 6421 6496

sales@pwsolarpower.com info@pwsolarpower.com www.pwsolarpower.com

## MECHANICAL CHARACTERISTICS

Cell Type	Polycrystalline
Number of cell	36pcs ( 4 x 9)
Size of Module	670 x 420 x 23mm
Weight	About 4.00kgs
Front Cover	3.2mm tempered glass with AR coating
Frame	Anodized aluminum alloy
Junction Box	IP65 Rated
Cable	N/A
Connector	MC4 or MC4 compatible

## MODULE WARRANTY

25-year limited warranty of 80% power output; 10-year limited warranty of 90% power output; 5-year limited warranty of materials and workmanship.

## PACKING



Standarding Packing: 10pcs/carton

Module Quantity of 20' container: 4300pcs

Module Quantity of 40' container: 5500pcs

## ENGINEERING DRAWING

## IV CURVES

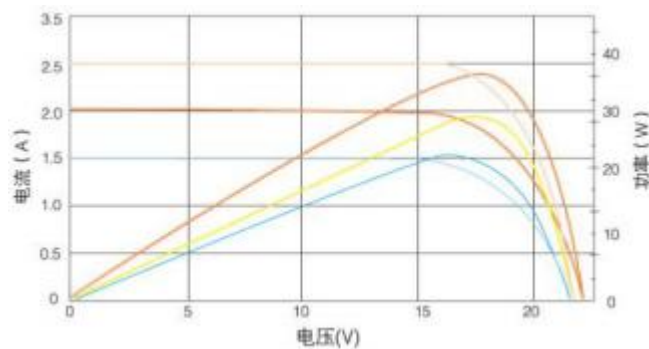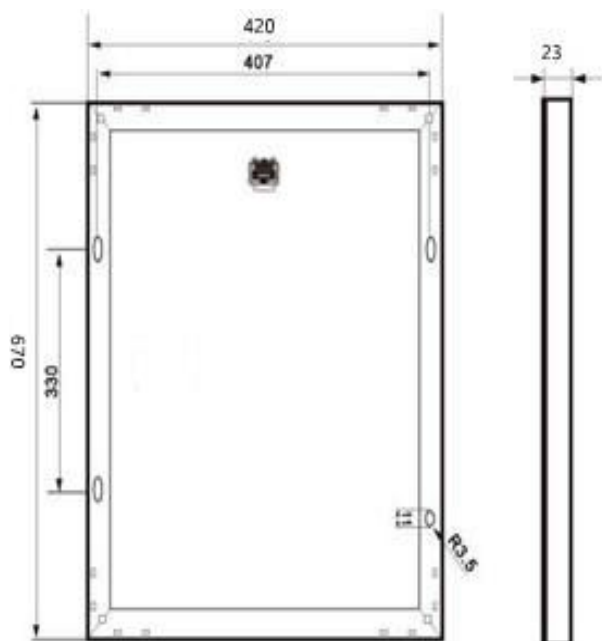

Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000

0086 532 85872070 0086 155 6392 6558 WhatsApp 0086 138 6421 6496

sales@pwsolarpower.com info@pwsolarpower.com www.pwsolarpower.com

Specifications in this datasheet are subject to change without prior notice