


PWSOLAR

100W (182*182)

MONOCRYSTALLINE MODULE

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

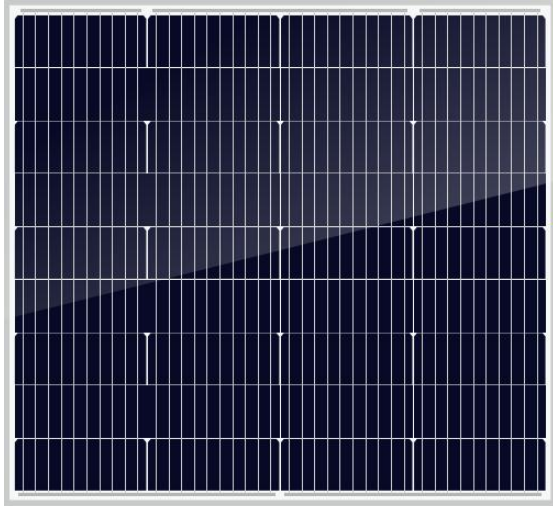

- ◆ High module conversion efficiency up to 18.16% by using innovative Half-cell design and Multi-busbar(MBB) cell technology.
- ◆ Low temperature coefficient and excellent performance under high temperature and low light conditions.
- ◆ Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- ◆ High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- ◆ Potential induced degradation (PID) resistance.
- ◆ Positive power tolerance of 0 ~ +5w.

ELECTRICAL CHARACTERISTICS AT STC

Model	PW100Wp-36M182
Maximum Power (P _{max})	100W
Power Tolerance	0 ~ + 5W
Open Circuit Voltage (VOC)	24.15V
Short Circuit Current (ISC)	5.02A
Voltage at Nominal Power (V _{mp})	21.00V
Current at Nominal Power (I _{mp})	4.78A
Size of Module	720 x 765 x 30mm
Standard Test condition	Irradiance:1000W/M2 Temp: 25°C , & AM :1.5G spectrum
Maximum system voltage	1000V DC
Operating temperature	- 40°C to +85°C
Module Efficiency	18.16%

ELECTRICAL CHARACTERISTICS AT STC

NOCT	45 +/-2°C
Voltage temperature coefficient(Voc)	-0.330%/°C
Current temperature coefficient I _{sc})	+0.058%/°C
Power temperature coefficient(P _{mpp})	-0.400%/°C
Minimum power tolerance	+/-10%
NOCT	45 +/-2°C



Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000

0086 532 85872070 0086 155 6392 6558 WhatsApp 0086 138 6421 6496

sales@pwsolarpower.com info@pwsolarpower.com www.pwsolarpower.com

MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline (182*72.80mm)
Number of cell	36pcs (4 x 9)
Size of Module	720 x 765 x 30mm
Weight	About 5.80kgs
Front Cover	3.2mm tempered glass with AR coating
Frame	Anodized aluminum alloy
Junction Box	IP67, 3 diodes
Cable	4mm ² (0.006inches ²), 900mm (11.81inches)
Connector	MC4 or MC4 compatible

MODULE WARRANTY

25-year limited warranty of 80% power output; 10-year limited warranty of 90% power output; 10-year limited warranty of materials and workmanship.

PACKING




Standarding Packing: 36pcs/Pallet

Module Quantity of 20' container: 1332pcs

Module Quantity of 40' container: 3168pcs

ENGINEERING DRAWING

IV CURVES

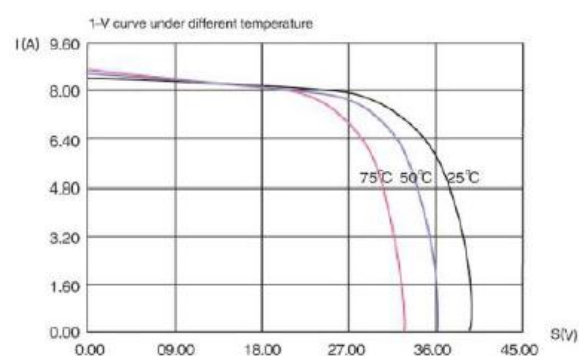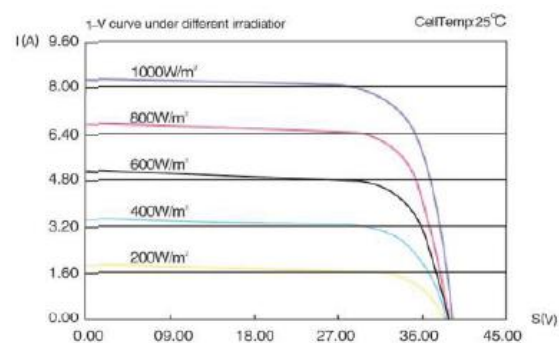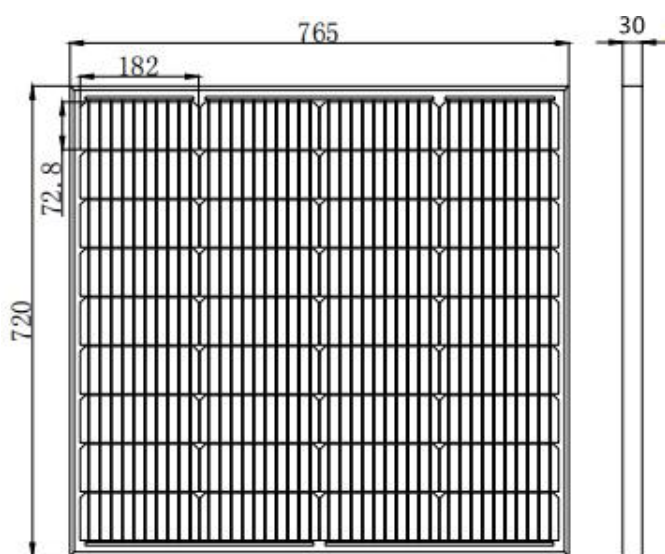

Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000

0086 532 85872070 0086 155 6392 6558 WhatsApp 0086 138 6421 6496

sales@pwsolarpower.com info@pwsolarpower.com www.pwsolarpower.com

Specifications in this datasheet are subject to change without prior notice