
PWSOLAR 320W

MONOCRYSTALLINE MODULE

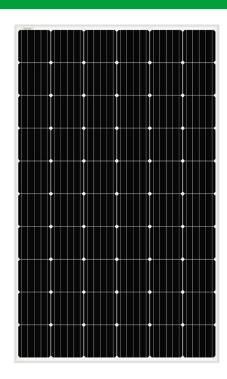

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module conversion efficiency up to 19.55% by using innovative Half-cell design and Multi-busbar(MBB) cell technology.
- Low temperature coefficient and excellent performance under high temperature and low light conditions.
- Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- Potential induced degradation (PID) resistance.
- Power tolerance of ±3%.

ELECTRICAL CHARACTERISTICS AT STC

Model	PW320Wp-60M
Maximum Power (Pmax)	320W
Power Tolerance	±3%
Open Circuit Voltage (VOC)	40.78V
Short Circuit Current (ISC)	10.18A
Voltage at Nominal Power (Vmp)	33.17V
Current at Nominal Power (Imp)	9.65A
Size of Module	1650 x 992 x 35mm
Standard Test condition	Irradiance:1000W/M2 Temp: 25°C , & AM :1.5G spectrum
Maximum system voltage	1000VDC
Operating temperature	- 40°C to +85°C
Module Efficiency	19.55%

ELECTRICAL CHARACTERISTICS AT STC

NOCT	45 +/·2°C
Voltage temperature coefficient(Voc)	-0.330%/°C
Current temperature coefficient I sc)	+0.058%/°C
Power temperature coefficient(Pmpp)	-0.400%/°C
Minimum power tolerance	+/-10%
NOCT	45 +/·2°C






















MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline
Number of cell	60pcs
Size of Module	1650 x 992 x 35mm
Weight	About 18.50kgs
Front Cover	3.2mm tempered glass with AR coating
Frame	Anodized aluminum alloy
Junction Box	IP68, 3 diodes
Cable	4mm ² (0.006inches ²), 900mm (11.81inches)
Connector	MC4 or MC4 compatible

MODULE WARRANTY

30-year limited warranty of 80% power output; 10-year limited warranty of 90% power output; 12-year limited warranty of materials and workmanship.

PACKING

Standarding Packing: 31pcs/Pallet

Module Quantity of 20' container: 360pcs

Module Quantity of 40' container: 924pcs

ENGINEERING DRAWING

IV CURVES

