


PWSOLAR

455W

MONOCRYSTALLINE MODULE

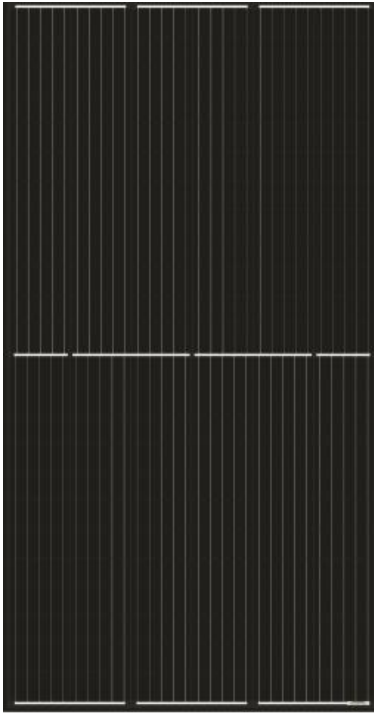

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- ◆ High module conversion efficiency up to 20.60% by using innovative Half-cell design and Multi-busbar(MBB) cell technology.
- ◆ Low temperature coefficient and excellent performance under high temperature and low light conditions.
- ◆ Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- ◆ High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- ◆ Potential induced degradation (PID) resistance.
- ◆ Power tolerance of $\pm 5\%$.

ELECTRICAL CHARACTERISTICS AT STC

Model	PW455Wp-144MFB
Maximum Power (P_{max})	455W
Power Tolerance	$\pm 5\%$
Open Circuit Voltage (VOC)	50.32V
Short Circuit Current (ISC)	11.32A
Voltage at Nominal Power (V_{mp})	42.00V
Current at Nominal Power (I_{mp})	10.83A
Size of Module	2108 x 1048 x 35mm
Standard Test condition	Irradiance:1000W/M2 Temp: 25°C , & AM :1.5G spectrum
Maximum system voltage	1000VDC/1500VDC
Operating temperature	- 40°C to +85°C
Module Efficiency	20.60%

ELECTRICAL CHARACTERISTICS AT STC

NOCT	45 +/- 2°C
Voltage temperature coefficient(V_{oc})	-0.33%/°C
Current temperature coefficient (I_{sc})	+0.058%/°C
Power temperature coefficient(P_{mpp})	-0.400%/°C
Minimum power tolerance	+/-10%
NOCT	45 +/- 2°C



MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline
Number of cell	144pcs (72 x 2)
Size of Module	2108 x 1048 x 35mm
Weight	About 24.00kgs
Front Cover	3.2mm tempered glass with AR coating
Frame	Anodized aluminum alloy
Junction Box	IP68, 3 diodes
Cable	4mm ² (0.006inches ²), 300mm (11.81inches)
Connector	MC4 or MC4 compatible

MODULE WARRANTY

12 year limited product; limited linear power warranty: 12 year 91.20% of nominal power output, 30 year 80.60% of nominal power output.

20 years product warranty; 30 years linear power output warranty



PACKING

Standarding Packing: 27pcs/Pallet


Module Quantity of 20' container: 280pcs

Module Quantity of 40' container: 704pcs

ENGINEERING DRAWING

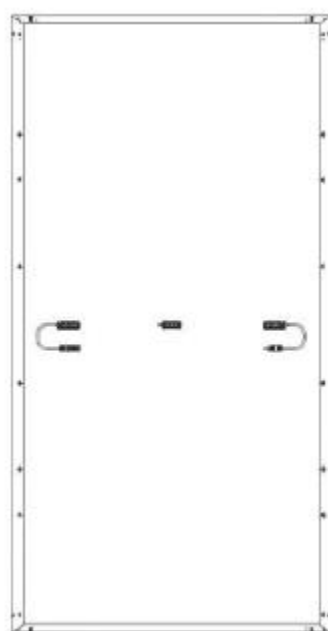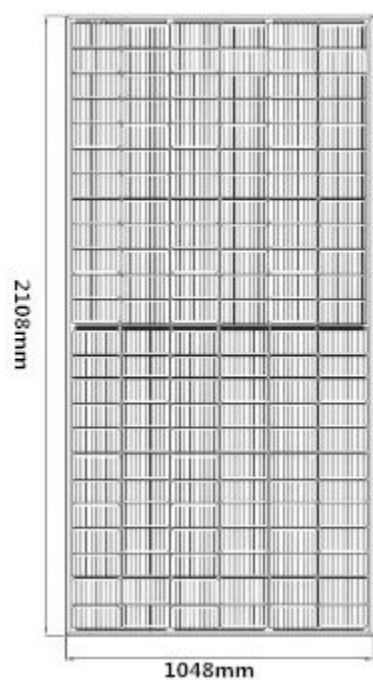

IV CURVES

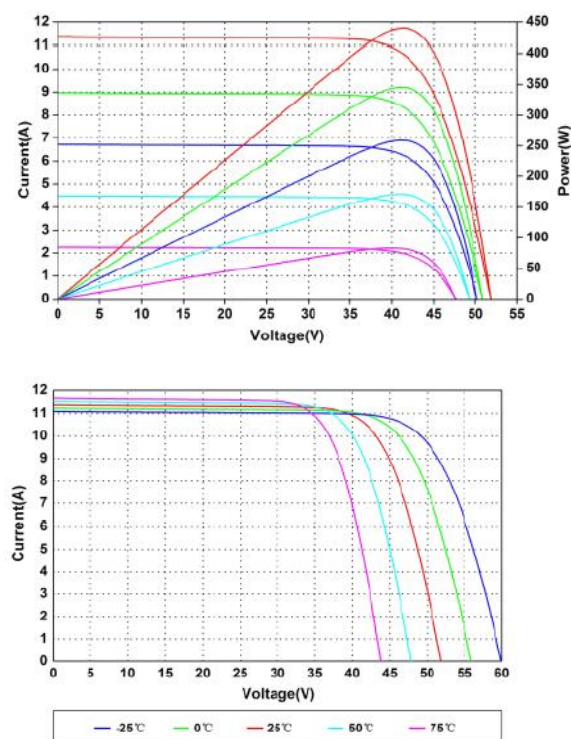

Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000

0086 532 85872070

0086 155 6392 6558 WhatsApp 0086 138 6421 6496

sales@pwsolarpower.com

info@pwsolarpower.com

www.pwsolarpower.com

Specifications in this datasheet are subject to change without prior notice